## **A2Y Series**




2 Socket MIL-Style, Right Angle, Nylon Molded Connector, Permanent Mount, 250 °F (121 °C) Max Temp



## **Product Features**

- 2 Socket Connection for use with CTC Standard & Compact Size, Top Exit, Single Axis Sensors
- Designed for a Wide Variety of Industrial Applications
- 316L Stainless Steel Locking Ring for Added Durability & Corrosion Resistance

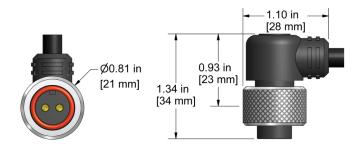

Specifications	
Application	Permanent Mount
Max Temperature	250° F (121° C)
Connector Type	2 Socket MIL-Style Right-Angle
Shell Material	Nylon Molded
Connector Insert Material	Nylon
Rating	IP68
Pin-Out	A = Signal (+) CTC Red
	B = Common (-) CTC Black

**Built to Order**